



EC2180

Blanket Warming Cabinet

21.8 ft³ (0.6m³) interior capacity

Glass doors



37-94°C (98-200°F) range

Deluxe electronic control

24-hour timer
(single programmable "off" period)

Plastic-coated interior surfaces

 **ENTHERMICS**
Medical Systems

www.enthermics.com

*Experience the Entermics difference:
Quality beyond comfort.*

EC2180 Blanket Warming Cabinet

Specifications:


The single-chamber, dual door warming cabinet is constructed with 20 gauge stainless steel exterior casing and double door design. Window doors allow observation of inventory with the doors closed. The cabinet is warmed using the patented Halo Heat® low-heat-density electrothermal cable array, mounted against the walls, eliminating the need for a heat circulating fan. The warming cabinet is equipped with a white epoxy-coated Blanket Support Assembly. The cabinet is furnished with one (1) transport handle on each end of the cabinet, and a full-perimeter rubber bumper assembly with 5" (127mm) heavy duty casters, two with locking brake.

Special Information:

- Right-hand door swing is standard. Left-hand door is available as a special order.

Control:

The chamber is controlled by one (1) electronic control which consists of a 4 digit L.E.D. display, on/off key, heat indicator L.E.D., increase and decrease keys, built-in lock-out feature and a series of prompt sequence indicators. The control can easily be set to operate in Fahrenheit or Celsius and has an adjustable temperature range of 37 - 94°C (98 - 200°F). Timer key allows the user to program the control to automatically turn on and turn off once during a 24 hour period at selected times. In the event of a power failure, the cabinet will remember its programming and begin to operate as before. A warming shut-off system, separate from the electronic control, is an additional safety feature.

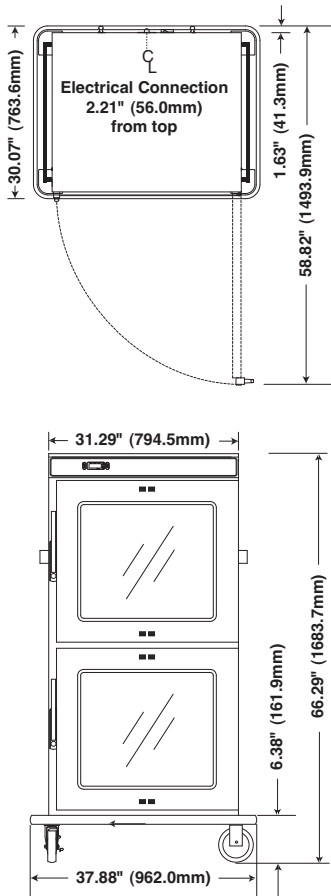

Capacity and Weights		
Interior Capacity per Compartment	21.8 cubic feet (c. 0.6m ³)	
Net Weight:	329 lb (149 kg) est.	
Ship Weight:	470 lb (213 kg)	
Electrical		
120 V.A.C. 50/60 Hz, 1ph 1600 Watts, 13.3 Amps	NEMA 5-20P 20A - 125V Plug Hospital Grade	UL ETC
230 V.A.C. 50/60 Hz, 1ph 1500 Watts, 6.5 Amps	BS 1363 Plug (UK only)	CE
	CEE 7/7 220-230V Plug	ETC
Options and Accessories		
Cylinder Lock for Door Handle	LK-22567	



**ENTHERMICS
Medical Systems**
www.enthermics.com

W164 N9221 Water Street • PO Box 443
Menomonee Falls, WI 53052-0443
Phone 262.251.8356 • 800.862.9276
Fax 262.251.7067
Email generalinfo@enthermics.com